



self-sealing channel, vaccum

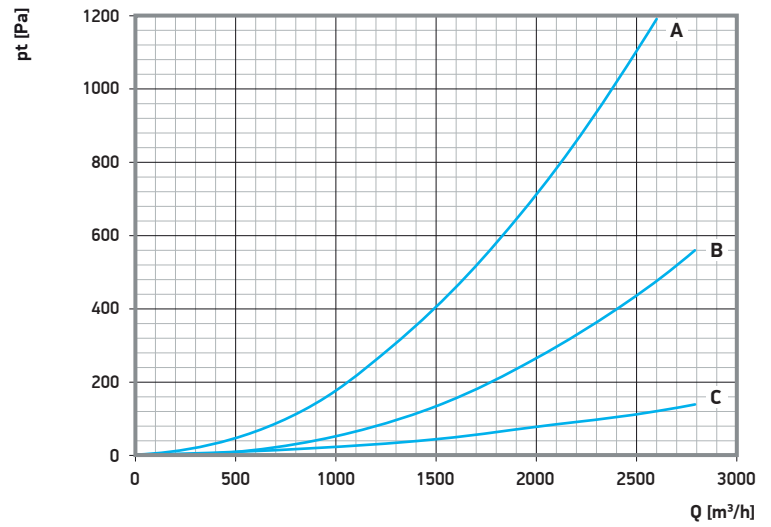

A - duct connector top DN 200 mm
 B - duct connector end DN 160 mm
 C - extraction rail type TECHNORAIL / m


Catalogue number	Rail selection	Sealing lip		Operating temperature	Max distance between brackets	Weight
		Material	Montage			
13-4000-001	175 cm ²	EPDM	Fast	up to +150°C	6 m	9 kg/mb

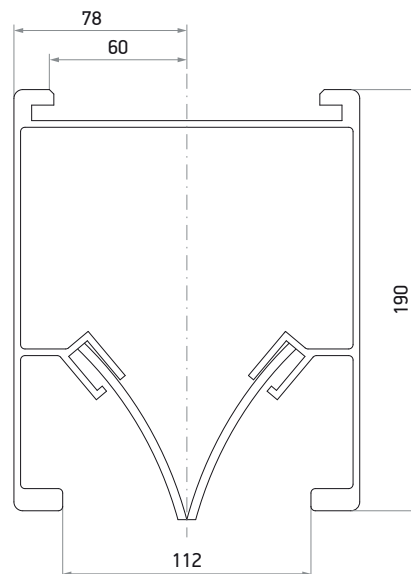

Extraction rail connector

- use every 5 m or 6 m
- made of steel
- mounting screws included
- weight 1,5 kg


Cat. no.:
13-4010-001



End cover

- made of aluminium
- mounting screws included
- weight 0,3 kg


Cat. no.:
13-4010-005



End stop

- mounted on both sides of the rail
- recommended 4 pcs. per rail
- weight 0,2 kg


Cat. no.:
13-4010-003



Rail brackets

- made of steel
- mounting screws included
- weight 0,7 kg


Cat. no.:
12-4110-002



Duct connector (top)

- for the top of the extraction rail
- made of steel


Cat. no.:	Diameter:	Height:	Weight:
12-4120-160	160 mm	180 mm	1,6 kg
12-4120-200	200 mm	180 mm	1,9 kg
12-4120-250	250 mm	180 mm	2,5 kg



Duct connector (top-long)

- lenght 600 mm
- mounting screws includede


Cat. no.:	Diameter:	Długość:	Masa:
12-4124-160	160 mm	270 mm	2,1 kg
12-4124-200	200 mm	270 mm	2,5 kg
12-4124-250	250 mm	300 mm	3,9 kg



Duct connector (end)

- made of steel
- lenght 200 mm
- mounting screws included

Cat. no.:	Diameter:	Weight:
13-4022-160	160 mm	1,0 kg
13-4022-200	200 mm	1,6 kg



Hydraulic end stop

- made of steel
- weight 3,5 kg


Cat. no.:
34-4040-045



Rail for Bowden cable operation

- made of steel
- weight 1,4 kg

Cat. no.:
13-4040-000




Sealing lips* for fast mounting

- made of EPDM
- dimensions 98 x 4 mm

Cat. no.:
13-010-007

*extraction rail's standard equipment



Should be selected separately:

